
## 25.4 cc. Trackital STRING TRIMMER



## DURABILITY

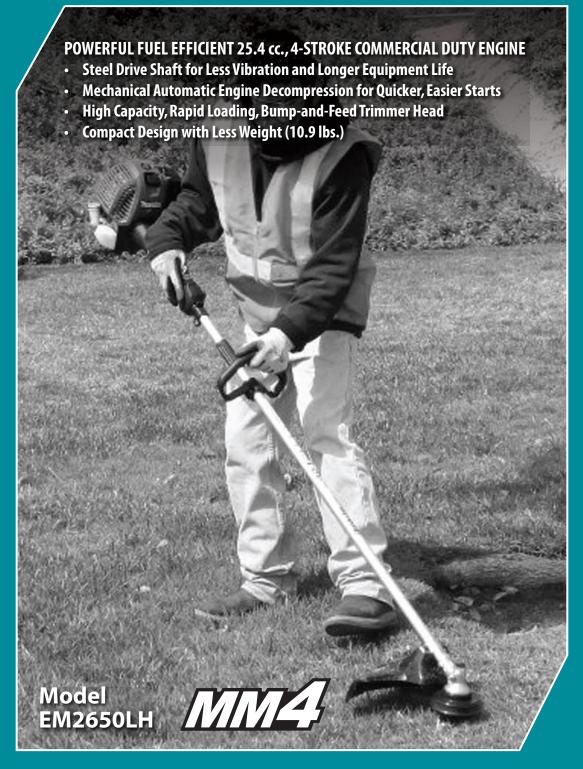

Heavy duty, dual stage air filter with large sealing areas and tool-less filter access

## **EFFICIENCY**



High capacity, rapid loading, bump-and-feed trimmer head

## CONVENIENCE



Oil filling port and drain plug are easily accessible with oil level view window

## PERFORMANCE



Multi-position lubrication system; engine inclines to any angle even during continuous operation

# 4-STROKE POWERED

## 25.4 cc. STRING TRIMMER

## **Model EM2650LH**

## **FEATURES & BENEFITS**

- Powerful fuel efficient 25.4 cc., 4-stroke commercial duty engine with multi-position lubrication system enables engine to be inclined to any angle even during continuous operation
- Steel drive shaft for less vibration and longer equipment life
- Multi-position lubrication system enables engine to be inclined to any angle even during continuous operation
- Mechanical Automatic Engine Decompression for quicker, easier starts
- Compact design with less weight (10.9 lbs.)
- High capacity, rapid loading, bump-and-feed trimmer head
- Heavy duty, dual stage air filter with large sealing areas is replaceable and easily accessible
- Oil filling port and drain plug are easily accessible with oil level view window for easy checking and replacing of oil
- Steel drive shaft for less vibration and longer equipment life
- Captured control wires engineered to prevent snagging for improved durability



Trimmer head (bump & feed) (T-01753)

### **SPECIFICATIONS** 17" Cutting width w/ debris shield 2.7 oz. Crank case capacity Engine displacement 25.4 cc. Max. power (7,000 RPM) 1.1 hp Max. engine RPM 9,500 Idle RPM 3,000 Unleaded gas Fuel type Fuel tank capacity 20.3 oz. Oil specification SAE 10W-30 class SF or higher Overall length 69-1/2" Dry weight 10.9 lbs. Shipping weight 20.9 lbs. **UPC** code 088381-608602

## **OPTIONAL ACCESSORIES**

- Trimmer head (bump & feed) (195149-0)
- Trimmer head (manual feed) (713300-B)
- Trimmer head (bump & feed) (713301-B)
- 10W-30 Engine oil (80 cc.) 48/pk (195826-4-48)





